floor Protection

AUSTRALIA'S TRUSTED WHOLESALE SUPPLIER OF FLOOR PROTECTION SOLUTIONS

AUSTRALIA WIDE DELIVERY | COMPETITIVE BULK PRICING | QUALITY YOU CAN TRUST

MERCURY 140GSM

SELF-ADHESIVE FLOOR PROTECTION FELT

Commercial-Grade Temporary Floor Protection for Construction, Renovation & Fit-Out Projects

ANTI-SLIP SURFACE | WATERPROOF PROTECTION | SELF-ADHESIVE BACKING | NO RESIDUE REMOVAL | REACH CERTIFIED | SGS ROHS COMPLIANT

MULTI-LAYER CONSTRUCTION

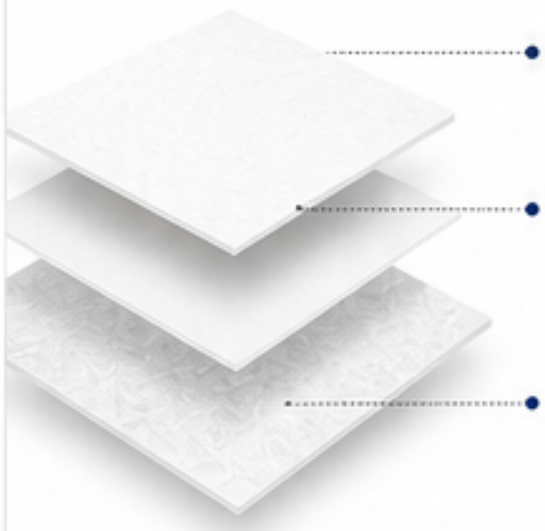

30gsm PE FILM
Waterproof surface layer protects against spills, paint & moisture

10gsm ADHESIVE LAYER
Strong pressure-sensitive adhesive for secure hold without residue

100gsm NON-WOVEN FELT
Heavy-duty felt absorbs impact and protects against scratches & damage

WHY THIS CONSTRUCTION WORKS

The combination of a waterproof PE film, pressure-sensitive adhesive layer and heavy-duty non-woven felt creates a floor protection system capable of handling active construction environments while remaining easy to install and remove.

PRODUCT SNAPSHOT

Product Name	Mercury Floor Protection Felt
Product Weight	140gsm
Colour	White
Roll Size	1m x 50m
Coverage	50m²
Waterproof	Yes
Anti-Slip	Yes
Adhesive Backing	Yes
Reusable	Yes
Recyclable	Yes

KEY PERFORMANCE BENEFITS

ANTI-SLIP SURFACE
Helps reduce slips and trips on active job sites

WATERPROOF BARRIER
Protects floors from paint, liquids and spills

SELF-ADHESIVE BACKING
Eliminates the need for tapes and additional fixings

RESIDUE-FREE REMOVAL
Leaves surfaces clean after removal

REUSABLE MATERIAL
Durable and can be reused on multiple projects

EASY INSTALLATION
Roll out, cut and apply in minutes

SUITABLE FOR USE ON

TIMBER FLOORS | ENGINEERED TIMBER | VINYL FLOORING | TILES | NATURAL STONE | POLISHED CONCRETE | STAIRCASES | COMMERCIAL FIT-OUTS

TECHNICAL SPECIFICATIONS

PROPERTY	RESULT
Product Type	Temporary Floor Protection
Material	Multi-Layer Non-Woven Felt
Weight	140gsm
Width	1m
Length	50m
Roll Coverage	50m²
Surface Finish	Anti-Slippery
Water Resistance	Excellent
Adhesive Type	Pressure Sensitive
Reusable	Yes
Recyclable	Yes
Storage Life	18 Months
Application Temperature	10°C – 35°C

COMPLIANCE & CERTIFICATIONS

REACH COMPLIANCE CERTIFIED
Our floor protection materials are manufactured without restricted hazardous substances and comply with REACH requirements.

SGS ROHS COMPLIANT
Independently tested to ensure compliance with RoHS requirements for restricted chemicals and heavy metals.

CONSTRUCTION SITE SUITABLE
Designed specifically for renovation, painting, flooring, commercial fit-out and building projects.

PACKAGING INFORMATION

Roll Width	1m
Roll Length	50m
Coverage	50m²
Roll Diameter	Approx. 260–280mm
Gross Weight	Approx. 7.5kg
Packaging	Heavy Duty Plastic Wrap
Pallet Quantity	42 Rolls
Delivery	Australia Wide

TYPICAL APPLICATIONS

RESIDENTIAL RENOVATIONS | COMMERCIAL FIT-OUTS | PAINTING PROJECTS | FLOORING INSTALLATIONS | NEW HOME CONSTRUCTION | PROPERTY MAINTENANCE | STAIR PROTECTION | OFFICE REFURBISHMENTS

WHY BUY FROM US?

- Australian Wholesale Supplier
- Australia-Wide Delivery
- Competitive Bulk Pricing
- Reseller Opportunities Available
- Direct Manufacturing Partnerships
- Commercial & Residential Solutions
- Custom Colours & Branding Available

NEED FLOOR PROTECTION FOR YOUR NEXT PROJECT?
Protect timber, tile, stone and finished surfaces with premium self-adhesive floor protection.

REQUEST A QUOTE | ORDER A SAMPLE | BECOME A RESELLER

0490 122 857
sales@floorprotection.com.au
www.floorprotection.com.au